

# Continuous, multi-function oil condition sensing

- 4 oil condition measurement parameters
- 4-20mA, 0-10v & CAN outputs
- Captures and retains ferrous debris
- Continuous real-time monitoring
- Easy installation
- Low cost of ownership



## ANALOGUE OUTPUT

	Voltage	4-20mA
<b>Channel 1 (fine)</b>	0 – 10V DC (configurable)	1mA - 20mA (configurable)
<b>Channel 2 (coarse)</b>	0 – 10V DC (configurable)	1mA - 20mA (configurable)
<b>Channel 3 (oil/temp)</b>	0 – 10V DC (configurable)	1mA - 20mA (configurable)
<b>Error indication</b>	0 – 10V DC (configurable)	1mA - 20mA (configurable)
<b>Optional output inhibit</b> (during zero/span)	0 – 10V DC (configurable)	1mA - 20mA (configurable)

## ELECTRICAL

	Voltage	4-20mA	CAN
<b>Supply voltage</b>	6 - 26V DC	9 - 26V DC	5 - 26V DC
<b>Over voltage protection</b>		>32V DC	
<b>Power consumption</b>	<2.9W	<5.6W	<2.8W
<b>Reverse polarity protection</b>		to -32V DC	
<b>Analogue resolution</b>		10 bit	
<b>Report rate</b>	10Hz	10Hz	1Hz
<b>Sensor configuration</b>			Accessible via USB

## MECHANICAL

<b>Sensor size</b>	57 x Ø24.5mm
<b>Display Enclosure</b>	105.5 x 105.5 x 66mm
<b>Enclosure mounting</b>	2 off M6 socket cap screws (not supplied)
<b>Materials (sensor)</b>	Aluminium alloy, FEP, PEI
<b>Materials (enclosure)</b>	Aluminium alloy, st/steel, polyester

## LIQUIDS

<b>Fuels</b>	Diesel, gasoline
<b>Oils</b>	Hydraulic, gear, mineral, vegetable, synthetic ester, semi-synthetic, polyalphaolefin, polyalkyleneglycol
<b>Coolants</b>	Ethylene glycol, Water
<b>Other</b>	Salt water

## ENVIRONMENTAL

<b>Sensor protection</b>	IP66 / IP68 / IP69k
<b>Enclosure protection</b>	IP65
<b>Differential pressure</b>	10 Bar
<b>Sensor operating temperature</b>	-40° to +150°C
<b>Enclosure operating temperature</b>	-40° to +85°C
<b>Humidity</b>	95% RH @ +55°C

## ORDERING


<b>Output:</b>	045 = 4-20mA	<b>Mounting Thread Code:</b>	See table overleaf
	046 = 0-10V		
	047 = CAN		
<b>4212 - PK -</b>	[ ] [ ] [ ] - [ ]	<b>USB cable</b>	= 1000-CO-116
		<b>USB stick</b>	= 1000-SW-001
		<b>Conduit kit</b>	= 4212-10-051-X

More information at [gillsc.com](http://gillsc.com)

E support@gillsc.com

T +44 (0)1590 613900


## DIMENSIONS

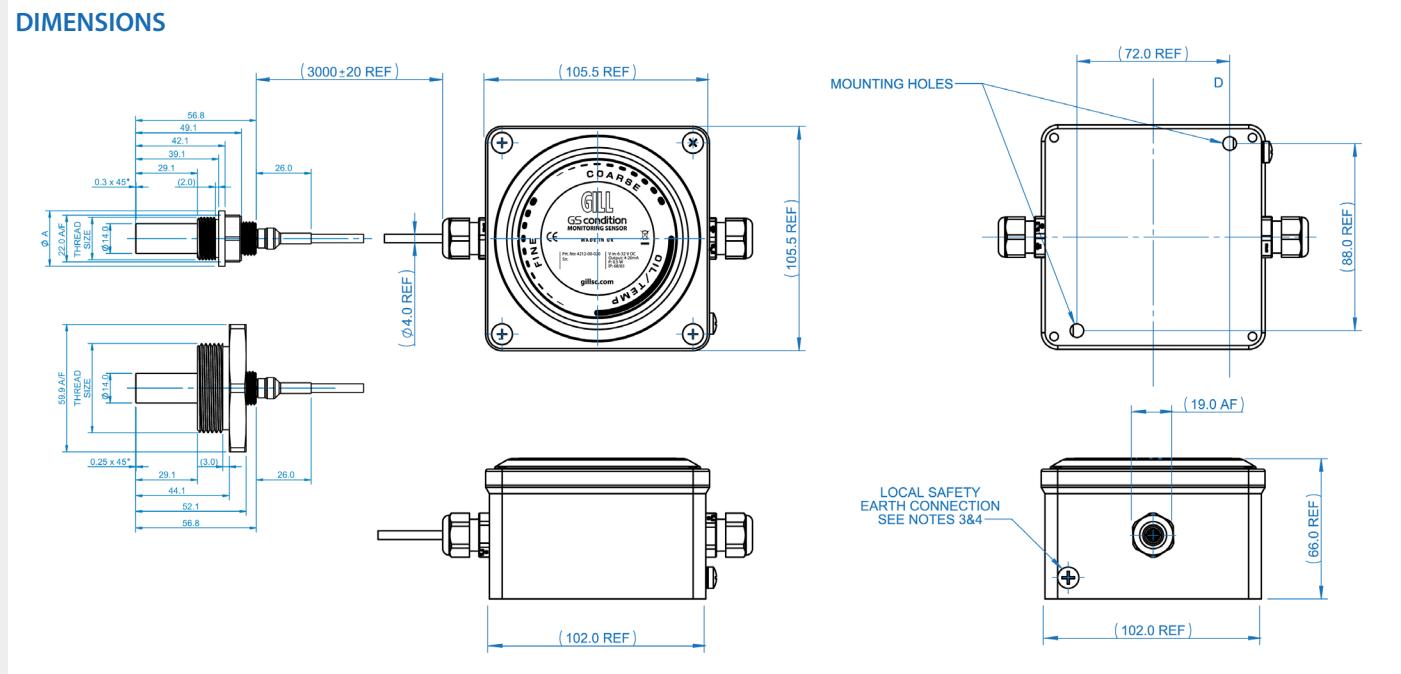


## MOUNTING THREADS

Thread Code	Thread Size	Outside Dia A	Spanner A/F	Torque ±10%	Thread Code	Thread Size	Outside Dia	Spanner A/F	Torque ±10%
A	M22 x 1.5	26.0	22.0	50 Nm	N	M42 x 2.0	67.0	60.0	100 Nm
B	M24 x 2.0	26.0	22.0	50 Nm	P	1 1/2" BSPP	67.0	60.0	100 Nm
C	3/4" x 16 UNF	26.0	22.0	50 Nm	Q	1" BSPP	67.0	60.0	100 Nm
D	1/2" BSPP	26.0	22.0	50 Nm	R	1 1/8" 12 UNF	67.0	60.0	100 Nm
E	M20 x 1.5	26.0	22.0	50 Nm	S	1 5/16" 12 UNF	67.0	60.0	100 Nm
F	M25 x 1.5	32.0	22.0	50 Nm					
G	M26 x 1.5	32.0	22.0	50 Nm					
H	M27 x 2.0	32.0	22.0	50 Nm					
J	M30 x 1.5	32.0	22.0	50 Nm					
K	3/4" BSPP	32.0	22.0	50 Nm					
L	1" 14 UNF	32.0	22.0	50 Nm					

## CONNECTIONS

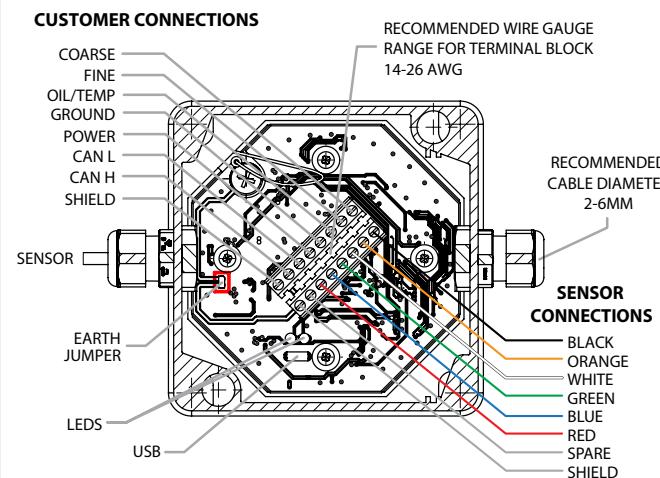

## CONDUIT KIT

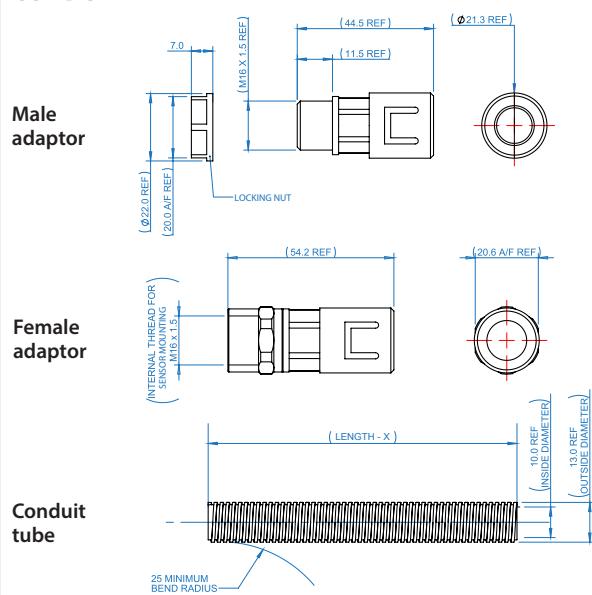

More information at [gillsc.com](http://gillsc.com)

E support@gillsc.com

T +44 (0)1590 613900



E & OE

CD4212I-lss 5

**GILL**  
Sensors & Controls